

4



3

2

1


THIS DRAWING/SPECIFICATION
 CONTAINS PROPRIETARY
 INFORMATION OF THE J.B.
 NOTTINGHAM AND CO., INC./
 DURALINE, WHICH SHALL NOT BE
 PUBLISHED, REPRODUCED, COPIED,
 FURTHER DISCLOSED AS THE
 BASIS OF MANUFACTURE FOR
 OR SALE OF APPARATUS TO
 OTHERS THAN THE J.B.
 NOTTINGHAM AND CO., INC.,
 EXCEPT BY WRITTEN PERMISSION
 OF A DULY AUTHORIZED
 REPRESENTATIVE OF SAID
 COMPANY.

REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED

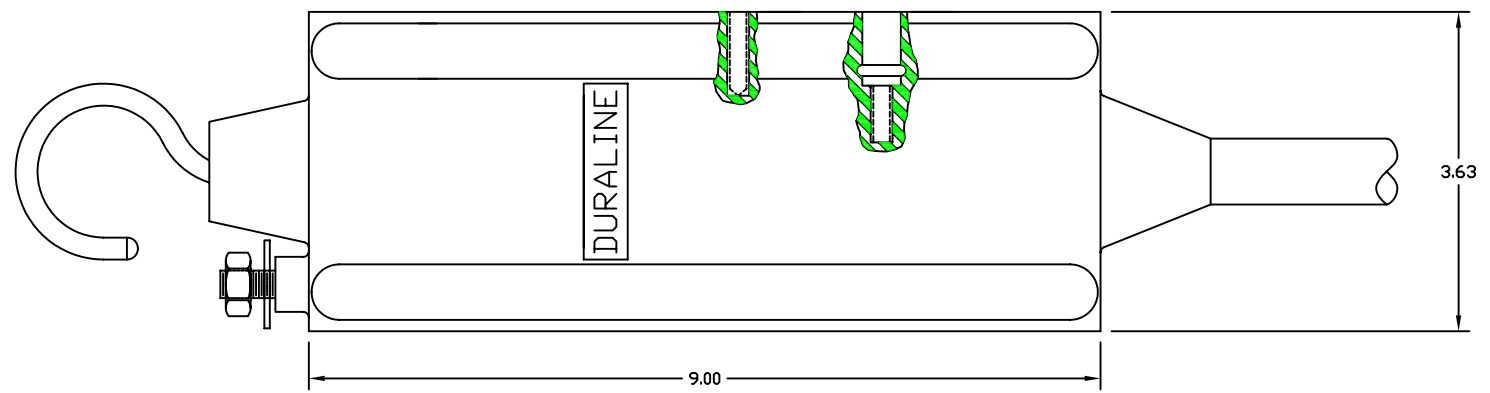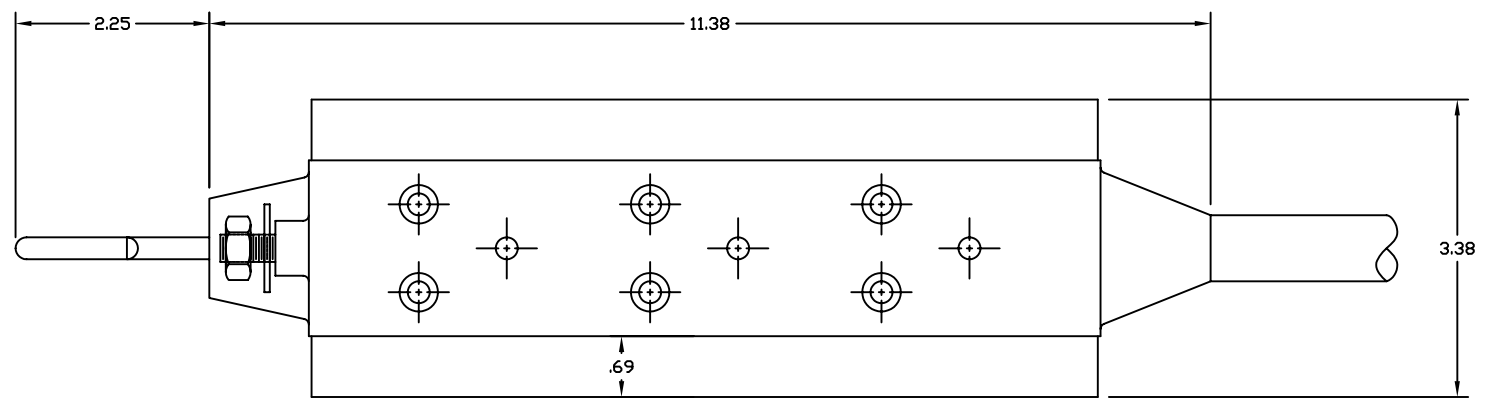

NOTE : CAP ASSEMBLY IS NOT SHOWN

CABLE STRAIN RELIEF MUST BE PROVIDED TO PRECLUDE
 DISTORTION OF RUBBER MOLDED ASSEMBLIES. CABLE
 BEND RADIUS AND BEND LOCATION MUST BE CHOSEN TO
 MINIMIZE LATERAL LOADING ON CONNECTOR.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON FRACTIONS DECIMALS ANGLES		DRAWING STARTED DATE		FINAL ASSEMBLY 30DB6-3S			
		MATERIAL:		DRAWN T.P. 8/27/84		 DIV. J.B. NOTTINGHAM 75 HOFFMAN LANE ISLANDIA, NY 11749			
		FINISH:		CHECKED D.R. 8/21/02					
NEXT ASSY		USED ON		ENGR		SIZE	CODE IDENT NO.		REV.
APPLICATION						C	16998	SM104000	
						SCALE	SHEET		